


Ruostumattomat monijaksoiset pystyasentoiset keskipakopumput

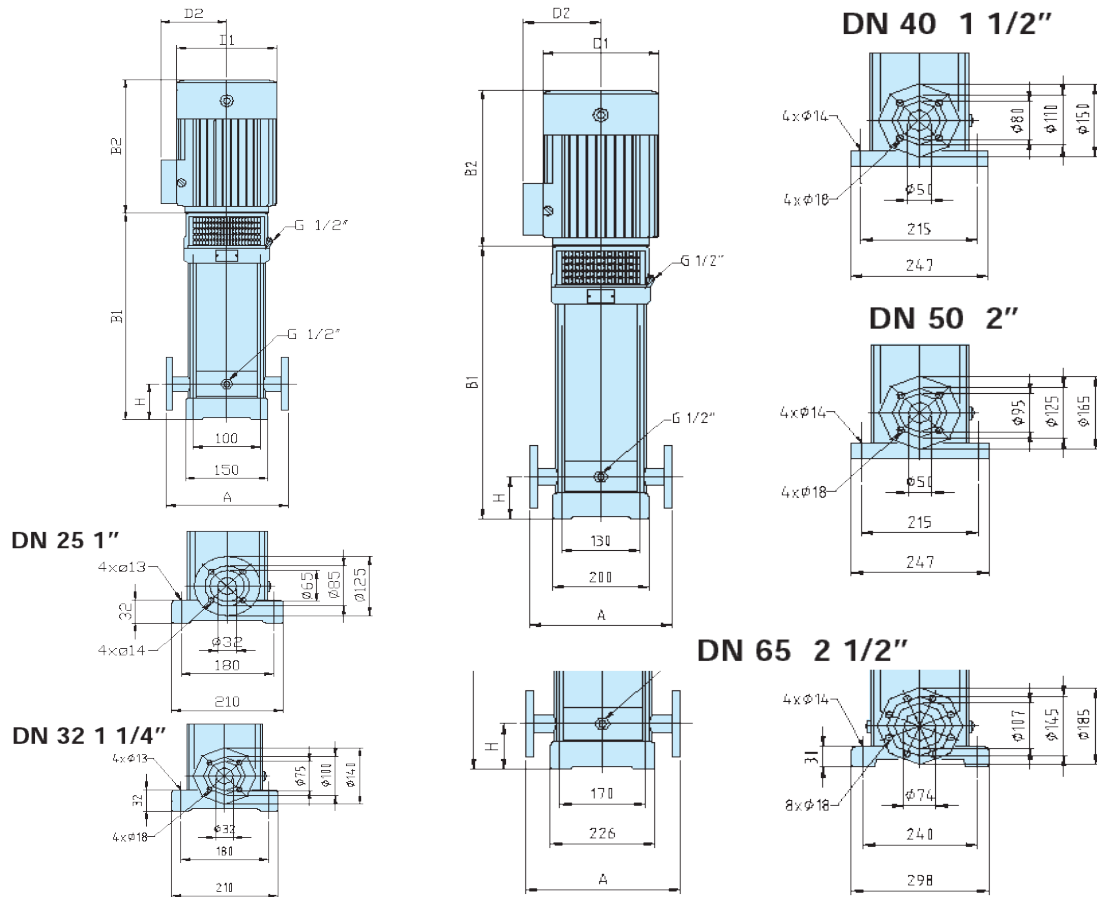

Malli	Mittatiedot mm								Laippa	K	L	S	Paino Kg
	A	H	B1	B2	B1+B2	D1	D2						
VS 2-4	210	50	256	225	481	145	110	DN25 1"	220	500	220	25	
VS 2-5	210	50	274	225	499	145	110	DN25 1"	220	520	220	24	
VS 2-7	210	50	315	225	540	145	110	DN25 1"	220	560	220	31	
VS 2-11	210	50	387	245	632	170	150	DN25 1"	220	650	220	32	
VS 2-15	210	50	476	245	721	170	150	DN25 1"	220	740	220	34	
VS 2-18	210	50	530	265	795	180	155	DN25 1"	220	815	220	42	
VS 2-22	210	50	602	265	867	180	155	DN25 1"	220	890	220	44	
VS 2-26	210	50	682	290	972	180	155	DN25 1"	220	990	220	51	
VS 4-3	210	50	265	225	490	145	110	DN32 1 1/4"	220	510	220	26	
VS 4-4	210	50	295	225	520	145	110	DN32 1 1/4"	220	540	220	30	
VD 4-6	210	50	350	245	595	170	150	DN32 1 1/4"	220	615	220	32	
VS 4-8	210	50	420	245	665	170	150	DN32 1 1/4"	220	685	220	38	
VS 4-12	210	50	530	265	795	180	155	DN32 1 1/4"	220	815	220	48	
VS 4-16	210	50	645	290	935	180	155	DN32 1 1/4"	220	955	220	51	
VS 4-19	210	50	725	325	1050	210	180	DN32 1 1/4"	220	1070	220	65	
VS 4-22	210	50	805	325	1130	210	180	DN32 1 1/4"	220	1150	220	66	

Malli	Mittatiedot mm											Paino Kg		
	3-vaihe	A	H	B1	B2	B1+B2	D1	D2	Laippa	K	L		S	
VS 8-3		261	80	380	245	625	170	150	DN40 1½"		280	645	280	41
VS 8-4		261	80	420	245	665	170	150	DN40 1½"		280	685	280	49
VS 8-6		261	80	480	265	745	180	155	DN40 1½"		280	765	280	50
VS 8-8		261	80	550	290	840	180	155	DN40 1½"		280	860	280	60
VS 8-10		261	80	610	325	935	210	180	DN40 1½"		280	955	280	72
VS 8-15		261	80	810	380	1190	250	210	DN40 1½"		280	1210	280	96
VS 8-19		261	80	930	380	1310	250	210	DN40 1½"		280	1330	280	100
VS 16-2		261	90	400	265	665	180	155	DN50 2"		280	685	280	51
VS 16-3		261	90	455	290	745	180	155	DN50 2"		280	765	280	62
VS 16-4		261	90	500	325	825	210	180	DN50 2"		280	845	280	71
VS 16-6		261	90	565	380	945	250	210	DN50 2"		280	965	280	94
VS 16-8		261	90	700	380	1080	250	210	DN50 2"		280	1100	280	104
VS 16-12		261	90	910	490	1400	330	255	DN50 2"		280	1420	280	181
VS 16-16		261	90	1090	490	1580	330	255	DN50 2"		280	1580	280	210
VS 32-3		320	105	645	430	1075	260	208	DN65 2½"		340	1095	340	124
VS 32-4		320	105	715	430	1145	260	208	DN65 2½"		340	1165	340	134
VS 32-5		320	105	890	490	1380	330	255	DN65 2½"		340	1400	340	196
VS 32-6		320	105	960	490	1450	330	255	DN65 2½"		340	1470	340	206
VS 32-8		320	105	1100	490	1590	330	255	DN65 2½"		340	1610	340	230
VS 32-10		320	105	1240	550	1790	330	255	DN65 2½"		340	1810	340	245