


Zehnder Aura



Radiator colour: Traffic White

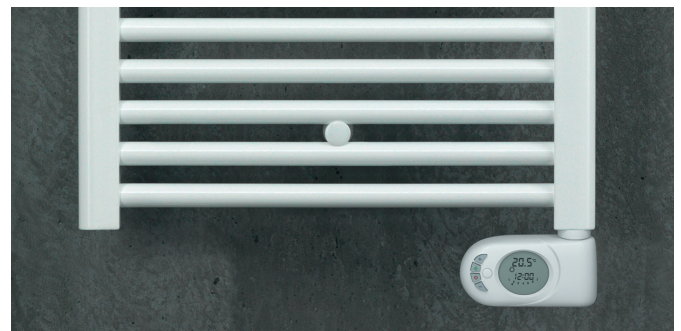

Radiator for electric operation with Musa Eco

Operation on hot water central heating system

Zehnder Aura decorative radiator made from horizontally arranged precision steel tubes with vertical D-profile tubes. Round tube Ø 22 mm, D-tube 30 x 40 mm. Thermal output tested to EN 422, with CE marking. 4 x 1/2" for flow/return in the manifold tube with air vent 1/4". Alternatively with centre connections 1/2", distance 50 mm, flow and return freely selectable. Delivered ready to install with matching wall brackets. Radiator with powder coating, in colour RAL 9016 as standard and in chrome, with packaging.

Maximum operating pressure	max. 10,0 bar
Operating temperature	max. 90 °C
Height mm
Length mm
Model

Benefits

- Harmonious design through D-profile of vertical tubes
- Large cut-outs
- Top-grade chrome finish
- Easy to clean
- Entry-level model for all types of tender businesses
- Dual energy operation possible with T-piece

Standard scope of delivery

- Powder coating to DIN55900, RAL 9016
- 2 x 1/2" connections for flow, return or 4 x 1/2" connections for flow, return, electric heating element
- 1 x blind plug 1/2" or 3 x blind plug 1/2" with middle connection
- 1 x air vent 1/2"
- Accessories in colour of radiator
- Packaging

Electric operation

Zehnder Aura decorative radiator made from horizontally arranged precision steel tubes with vertical D-profile tubes. Round tube Ø 22 mm, D-tube 30 x 40 mm. With built-in electric heating element Musa Eco. Protection class IP 44 (splashproof), for mains power supply of 230 V. Connection cable (1,3 m) with Euro plug. Installation at bottom right. Decorative radiator filled with heat transfer fluid.

Delivered ready to install with elegant wall brackets. Standard version with powder coating, in colour RAL 9016, in special colour on request.


Benefits

- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- User-friendly control device allows simple operation
- Customisable daily and weekly programmes for convenient, on-demand operation
- Increased safety with keylock

Standard scope of delivery

- Powder coating to DIN 55900, RAL 9016
- Filled with heat transfer liquid
- With integrated electric heating element MUSA Eco with seven operational modes: comfort, night, anti-freeze, fil-pilot, chrono, timer- 2h, stand-by, right-mounted
- Mounting accessories in colour of radiator
- Packaging

Overview of models

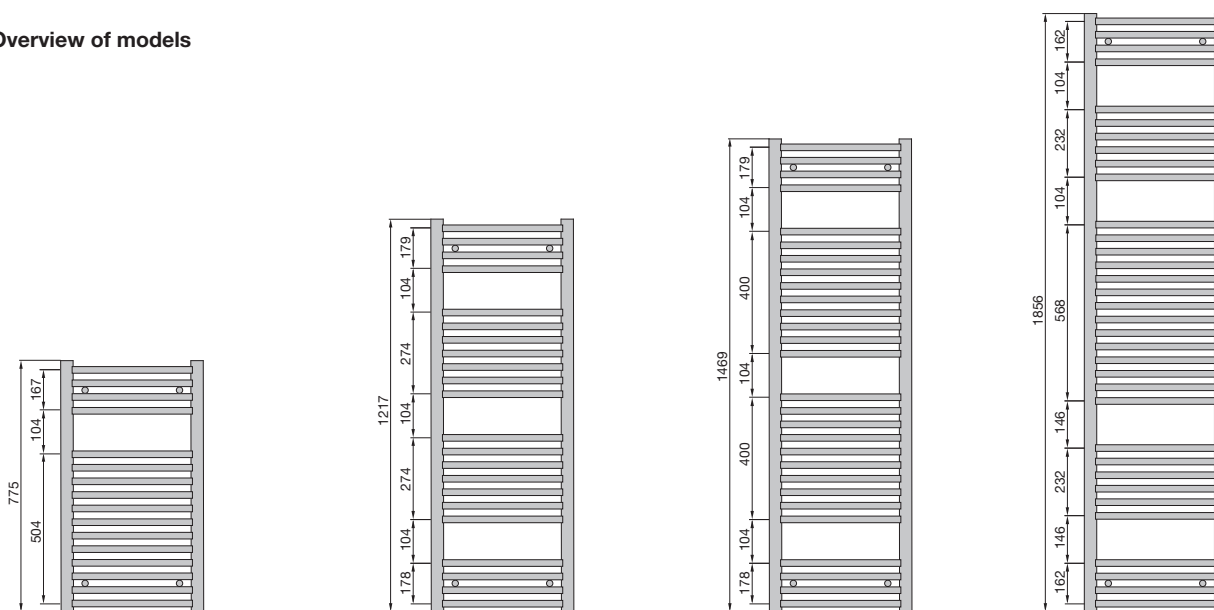

Connection to hot water central heating system or for dual energy operation

Minimum quantity per order:
10 pcs

Painted version, connection from bottom

Model	H mm	L mm	Thermal output				Exp. n	Classification Electric heating element Watt	V dm ³	M kg
			EN 442 ^③ Watt	70/55/24 Watt	55/45/24 Watt	55/45/20 Watt				
PBN-080-045	775	450	327	234	146	176	1,20	300	3,4	5,3
PBN-120-045	1217	450	468	335	207	248	1,23	300	4,8	7,7
PBN-150-045	1469	450	575	410	253	303	1,24	300	6,0	9,6
PBN-180-045	1856	450	719	511	314	379	1,24	600	7,4	12,0
PBN-080-050	775	500	358	257	161	193	1,20	300	3,6	5,8
PBN-120-050	1217	500	512	365	225	271	1,23	300	5,2	8,3
PBN-150-050	1469	500	631	449	276	332	1,24	600	6,5	10,4
PBN-180-050	1856	500	788	560	344	415	1,24	600	8,0	12,8
PBN-080-060	775	600	418	303	190	226	1,19	300	4,1	6,6
PBN-120-060	1217	600	598	424	262	317	1,23	600	5,9	9,6
PBN-150-060	1469	600	740	525	324	392	1,23	600	7,4	11,9
PBN-180-060	1856	600	925	656	404	487	1,24	900	9,1	14,6

Painted version, connection central 50 mm

Model	H mm	L mm	Thermal output				Exp. n	Classification Electric heating element Watt	V dm ³	M kg
			EN 442 ^③ Watt	70/55/24 Watt	55/45/24 Watt	55/45/20 Watt				
PBN-080-045-05	775	450	327	234	146	176	1,20	300	3,4	5,3
PBN-120-045-05	1217	450	468	335	207	248	1,23	300	4,8	7,7
PBN-150-045-05	1469	450	575	410	253	303	1,24	300	6,0	9,6
PBN-180-045-05	1856	450	719	511	314	379	1,24	600	7,4	12,0
PBN-080-050-05	775	500	358	257	161	193	1,20	300	3,6	5,8
PBN-120-050-05	1217	500	512	365	225	271	1,23	300	5,2	8,3
PBN-150-050-05	1469	500	631	449	276	332	1,24	600	6,5	10,4
PBN-180-050-05	1856	500	788	560	344	415	1,24	600	8,0	12,8
PBN-080-060-05	775	600	418	303	190	226	1,19	300	4,1	6,6
PBN-120-060-05	1217	600	598	424	262	317	1,23	600	5,9	9,6
PBN-150-060-05	1469	600	740	525	324	392	1,23	600	7,4	11,9
PBN-180-060-05	1856	600	925	656	404	487	1,24	900	9,1	14,6

③ Thermal output measured according to EN 442, ΔT 50 K (75/65/20 °C)

Zehnder Aura

Connection to hot water central heating system or for dual energy operation

Minimum quantity per order:
10 pcs

Chrome-plated version, connection from bottom

Model	H mm	L mm	Thermal output				Exp. n	Classification Electric heating element Watt	V dm ³	M kg
			EN 442 ³ Watt	70/55/24 Watt	55/45/24 Watt	55/45/20 Watt				
PBCN-080-045	775	450	206	145	87	105	1,30	-	3,4	5,5
PBCN-120-045	1217	450	303	213	128	155	1,30	300	4,8	8,0
PBCN-150-045	1469	450	368	259	155	188	1,30	300	6,0	9,8
PBCN-180-045	1856	450	468	329	198	239	1,30	300	7,4	12,2
PBCN-080-050	775	500	230	161	98	119	1,28	-	3,6	5,9
PBCN-120-050	1217	500	330	232	140	169	1,29	300	5,2	8,5
PBCN-150-050	1469	500	407	284	171	209	1,29	300	6,5	10,5
PBCN-180-050	1856	500	513	360	217	262	1,30	300	8,0	13,0
PBCN-080-060	775	600	271	195	119	142	1,25	-	4,1	6,7
PBCN-120-060	1217	600	390	273	165	201	1,28	300	5,9	9,6
PBCN-150-060	1469	600	481	338	204	248	1,28	300	7,4	11,9
PBCN-180-060	1856	600	607	425	257	312	1,29	600	9,1	14,7

Chrome-plated version, connection central 50 mm

Model	H mm	L mm	Thermal output				Exp. n	Classification Electric heating element Watt	V dm ³	M kg
			EN 442 ³ Watt	70/55/24 Watt	55/45/24 Watt	55/45/20 Watt				
PBCN-120-045-05	1217	450	303	213	128	155	1,30	300	4,8	8,0
PBCN-150-045-05	1469	450	368	259	155	188	1,30	300	6,0	9,8
PBCN-180-045-05	1856	450	468	329	198	239	1,30	300	7,4	12,2
PBCN-080-050-05	775	500	230	161	98	119	1,28	-	3,6	5,9
PBCN-120-050-05	1217	500	330	232	140	169	1,29	300	5,2	8,5
PBCN-150-050-05	1469	500	407	284	171	209	1,29	300	6,5	10,5
PBCN-180-050-05	1856	500	513	360	217	262	1,30	300	8,0	13,0
PBCN-120-060-05	1217	600	390	273	165	201	1,28	300	5,9	9,6
PBCN-150-060-05	1469	600	481	338	204	248	1,28	300	7,4	11,9
PBCN-180-060-05	1856	600	607	425	257	312	1,29	600	9,1	14,7

Electric-only operation



Painted version

Model	H ³ mm	L mm	Classification Electric heating element Watt
PBEZ-080-40/MQ	786	400	300
PBEZ-090-50/MQ	906	500	500
PBEZ-120-50/MQ	1226	500	750
PBEZ-180-50/MQ	1866	500	1000
PBEZ-120-60/MQ	1226	600	750
PBEZ-150-60/MQ	1466	600	1000
PBEZ-180-60/MQ	1866	600	1000

Chrome-plated version

Model	H ³ mm	L mm	Classification Electric heating element Watt
PBECZ-080-40/MQ	786	400	150
PBECZ-090-50/MQ	906	500	200
PBECZ-120-50/MQ	1226	500	300
PBECZ-180-50/MQ	1866	500	500
PBECZ-120-60/MQ	1226	600	400
PBECZ-150-60/MQ	1466	600	400
PBECZ-180-60/MQ	1866	600	600

Black matt version

Model	H ³ mm	H + Musa Eco mm	L mm	Classification Electric heating element Watt
PBEBZ-080-40/MQ	786	860	400	300
PBEBZ-090-50/MQ	906	980	500	500
PBEBZ-120-50/MQ	1226	1300	500	750
PBEBZ-150-60/MQ	1466	1540	600	1000

© Thermal output measured according to EN 442, ΔT 50 K (75/65/20 °C)

Accessories (surcharge)	Article number
■ Electric heating element for dual energy operation	-
■ Zehnder valves, lockshield valves and connection fittings	-
■ Zehnder thermostat LH2, M 30 x 1.5, white	819140
■ Zehnder thermostat LH2, M 30 x 1.5, chrome	819148




Operation on hot water central heating system:

Wall mounting

Wall mounting
centre connections 50 mm

Electric operation:


with electric heating element
Musa Eco

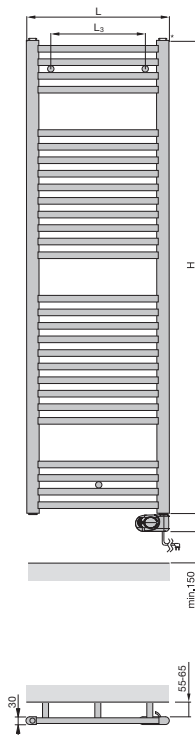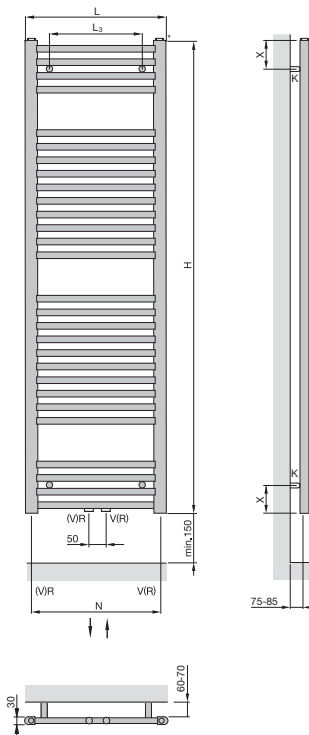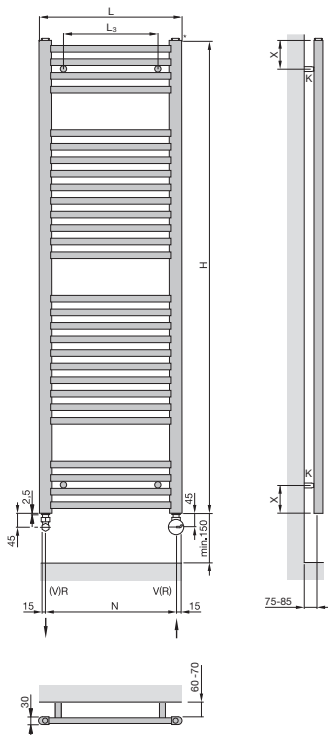

Dual energy operation:
with valve block 50 mm angled
and electric heating element DBM

- H = Height
- L = Length
- K = Bracket
- V = Flow 1/2"
- R = Return 1/2"
- N = Boss spacing, L - 50 mm
- L₃ = Length - 150 mm
- X = Fixing point

Dimensions in mm



Hot water central heating version

H (mm)	X (mm)
775	94
1217	105
1469	105
1856	88

Electric operation

H (mm)	H with controller (mm)	X (mm)
786	860	93
906	980	93
1226	1300	93
1466	1540	93
1866	1940	93